




USB RF SPDT Switch

50 MHz – 6 GHz

Description:

USBSP2T - USB powered RF SPDT Switch with operation range from 50MHz to 6GHz. Switch can be controlled through keypad and LED display or computer application.

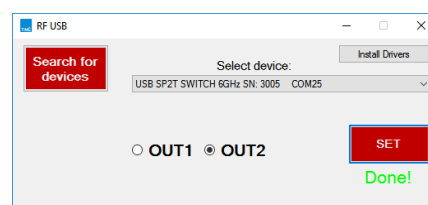

Technical specifications:

Impedance:	50 Ω	
Frequency Range	50 MHz to 6000 MHz	
Isolation	Typ.	Min.
	40 dB	37 dB
Input IP3	65 dBm	
Insertion loss:	Typ.	Max.
	1.5 dB	2.25dB
Switching Speed:	10μs typ.	
Input/Output VSWR:	Max. 1.5:1, Typ. 1.25	
Max. RF Input Power	28 dBm CW; 31 dBm Pulse	
RF Connectors:	SMA - female	
Dimensions:	55x80x25 mm	
Package content:	USBSP2T, USB cable, Software package	

